


PEINER Schnellaufbaukran SMK 108/1

Fast self erecting tower crane
Grue à montage rapide

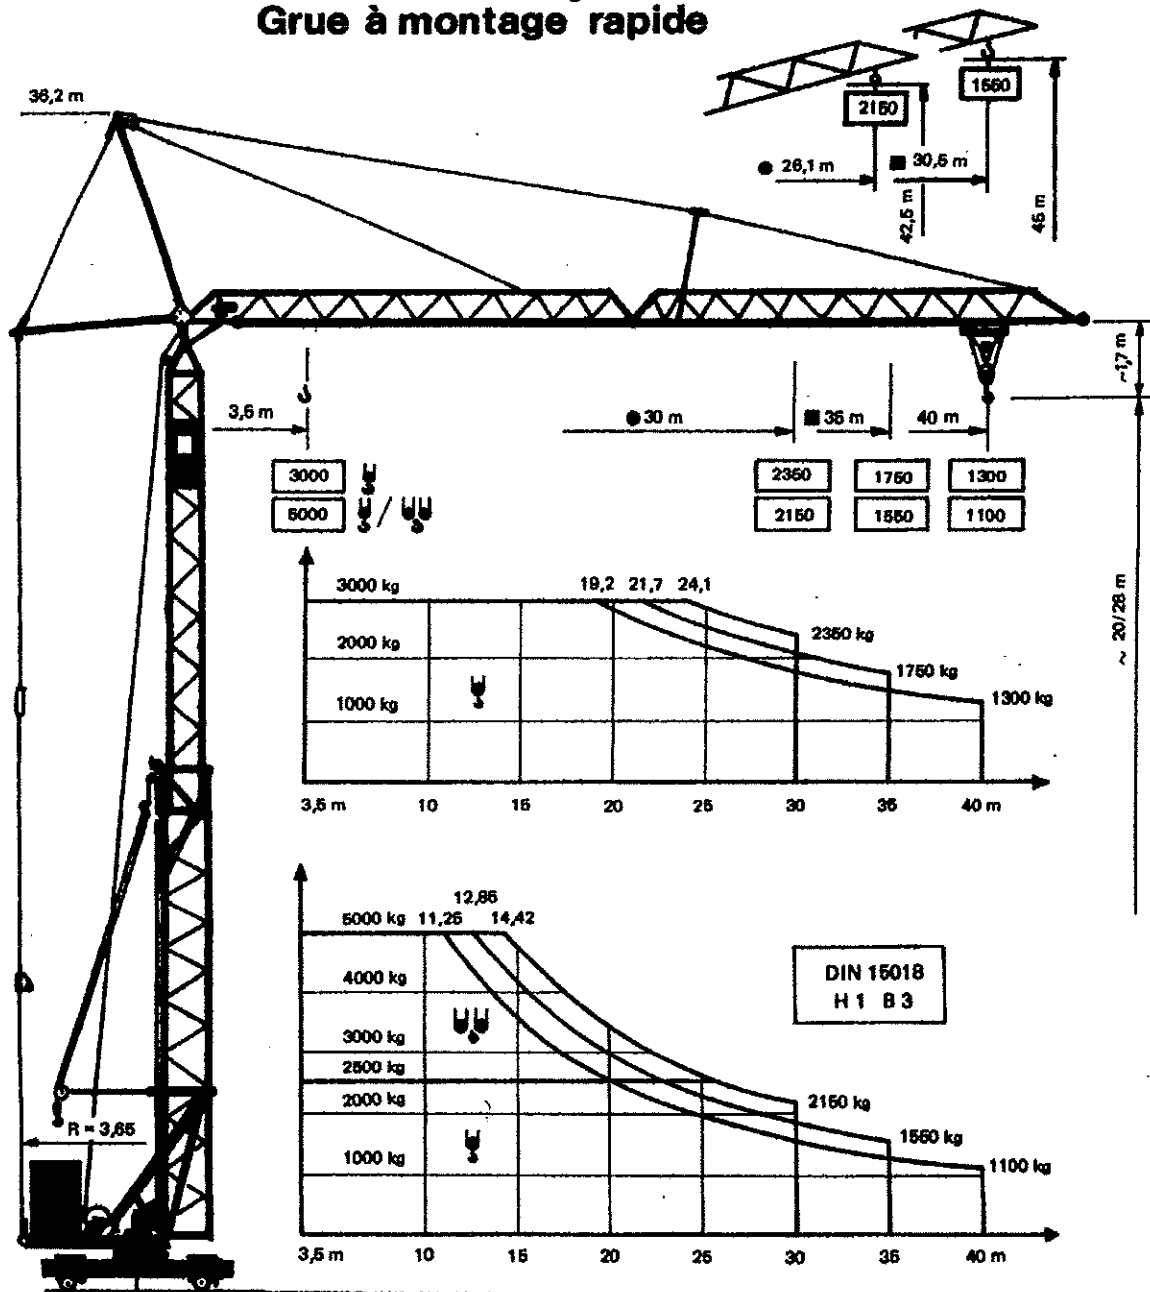

Peiner Schnellaufbaukran
Peiner fast self erecting tower crane
Grue Peiner à montage rapide

SMK 108/1

Max. Tragfähigkeit Lifting capacity Force de levage	5,0 t
Max. Ausladung Radius Portée	40 m
Max. Nutzlastmoment Load moment Couple de charge utile	720 kNm

Geschwindigkeiten / speeds / Vitesses

Type					+								Motor- Leistung Power Puissance KW
	 			m/min 52	kg 1500			m/min 52	kg 1500		m/min 26	kg 3000	
				26	3000			26	2500		13	5000	
HK3 1500				6 m/min				6 m/min			3 m/min		16
K 2 – 5			v = 45 / 22 m/min.										2,6
FD 48			v = 30 m/min.										2 x 2,2
DSW 3 – 6			n = 0,5 → 0,9 min ⁻¹										4,4
380 V / 50 Hz / 3 Ph			Anschlußwert / connection power / Puissance installée										≈29 KW

Gewichte + Maße / weights and size / Poids et mesures

Konstruktionsgewicht Construction weight Poids de construction	kg	20500		Führenstand Sichthöhe Height of sight from drivers cabin Hauteur de vue de la cabine	m	~28/18
Gegengewicht Counterweight Contre - poids	kg	23000		Kabeltrommel (Fahrweg) Cable winder (length of track) Enrouler (longueur de voie)	m	72
max. Eckdruck max. wheel load Pression max. per galot	KN	228		Kabelquerschnitt Cable cross section Section du câble	mm ²	4 x 16
Spurweite / Radstand track gauge / wheel gauge Ecartement de voie / Empattement	m	4,20		Schienenprofil Rail profile Rail profil		S41-S49
				Kurveninnenradius bei Kurvenfahrwerk Internal curve radius rail undercarriage curve going Rayon de virage intérieur au train de roulement virage - mobile	m	8,5

Straßentransport mit KSL 20 / Road transport with KSL 20 / Transport en route avec KSL 20

